

Cleco[®]
Production Tools

CellClutch[™]
Cordless Assembly Tools

SMART HAS NEVER BEEN SO SIMPLE.



CORDLESS ASSEMBLY TOOLS THAT ARE **SMART** YET **SIMPLE**,
BRINGING PROGRAMMABILITY TO YOUR LINE.

SMART HAS NEVER BEEN SO SIMPLE

Cleco's CellClutch™ is the newest innovation in cordless clutch tools. This tool is the perfect upgrade from pneumatic tools. CellClutch offers the simplicity of a mechanical clutch and the smarts of programmable run-down strategies and standard batch counting.



Smart.

Programmable Rundown Strategies with Standard Batch Counting

CellClutch has the ability to signal the operator if a batch is complete or alert the operator to any cross threads or rehits within a fastener batch. Programmable rundown strategies help eliminate expensive errors ensuring quality and accuracy from the start.



Simple.

Cleco Clutch

A mechanically adjustable clutch provides a positive shut off that controls torque output.

Single Battery Platform

Milwaukee® M18 Red Lithium battery can be used across the entire cordless range to reduce complexity and costs in your plant.

Smart.
Simple.

Proven Cleco Clutch

Safety, accuracy and repeatability with a CMK >1.67 (at a tolerance of +/-10% in accordance with ISO 5393)

Programmable Rundowns with Standard Batch Counting

Make your tasks easier with up to 7 programmable stages via USB interface. Standard features include batch count, angle or duration parameters and speed adjustment

Multi-Color LED

See your workpiece more clearly with the built-in work light and secondary “ok/not ok” operator feedback

Operator Status Light

See clearly and easily rundown and batch count status with color indicator light

CellClutch™ Cordless Assembly Tools are smart yet simple, bringing programmability to your line.

Low Battery Warning

Prevent under-torqued fasteners with the low battery shut off



RIGHT ANGLE



MODEL NUMBER	SPEED		Nm		Ft-lb		WEIGHT* kg (lb)	LENGTH mm (in)	SIDE TO CENTER mm (in)	HEIGHT mm (in)	OUTPUT
	r/min	r/max	Min Torque	Max Torque	Min Torque	Max Torque					
CLBA083	92	915	2.2	8	1.6	5.9	1.46 (3.2)	452.4 (17.81)	12.5 (0.49)	76.0 (2.99)	3/8" Square Drive
CLBA123	65	650	3.3	12	2.4	8.8	1.46 (3.2)	452.4 (17.81)	12.5 (0.49)	76.0 (2.99)	3/8" Square Drive
CLBA203	36	360	8.3	21	6.1	15.5	1.73 (3.8)	492 (19.37)	15.0 (0.59)	76.0 (2.99)	3/8" Square Drive
CLBA303	26	255	8.3	30	6.1	22.1	1.73 (3.8)	492 (19.37)	15.0 (0.59)	76.0 (2.99)	3/8" Square Drive
CLBA403	19	190	15.1	41	11.1	30.2	1.83 (4.0)	513 (20.20)	18.5 (0.73)	76.0 (2.99)	3/8" Square Drive

*Values do not include battery. 2.0 Ah Battery weighs 0.43 kg. 5.0 Ah Battery weighs 0.72 kg.

PISTOL



MODEL NUMBER	SPEED		Nm		Ft-lb		WEIGHT* kg (lb)	LENGTH mm (in)	SIDE TO CENTER mm (in)	HEIGHT mm (in)	OUTPUT
	r/min	r/max	Min Torque	Max Torque	Min Torque	Max Torque					
CLBP04Q	177	1770	1.1	4	0.8	2.9	1.04 (2.3)	213.5 (8.41)	28.5 (1.12)	209 (8.23)	1/4" Hex Quick Release
CLBP08Q	95	985	2.1	8	1.5	5.9	1.04 (2.3)	213.5 (8.41)	28.5 (1.12)	209 (8.23)	1/4" Hex Quick Release
CLBP12Q	70	700	3.2	12	2.4	8.8	1.04 (2.3)	213.5 (8.41)	28.5 (1.12)	209 (8.23)	1/4" Hex Quick Release

*Values do not include battery. 2.0 Ah Battery weighs 0.43 kg. 5.0 Ah Battery weighs 0.72 kg.

BATTERIES AND CHARGERS




MODEL NUMBER	DESCRIPTION
T50-1000497	18V, 2.0 Ah Battery (.43 kg / .94 lb)
T50-1000498	18V, 5.0 Ah Battery (.72 kg / 1.60 lb)
T50-1000499	18V Rapid Charger (NA)
T50-1000500	18V 6-Bay Sequential Charger (NA)
T50-1000506	18V Rapid Charger (Europe, Middle East, Africa)
T50-1000507	18V Charger (Brazil)
T50-1000508	18V 6-Bay Sequential Charger (Europe, Middle East, Africa)
T50-1000543	18V Charger (Argentina)
T50-1000544	18V Rapid Charger (United Kingdom)
T50-1000545	18V Rapid Charger (China)
T50-1000546	18V Rapid Charger (Japan)
T50-1000547	18V 6-Bay Sequential Charger (United Kingdom)

TORQUE ANALYZER



MODEL NUMBER	DESCRIPTION
CTA0414	0.4-4 Nm Torque Analyzer
CTA3038	3.0-30 Nm Torque Analyzer
CST6838	68 Nm Stationary Transducer
CJK38	Female Stationary joint kit 3/8"

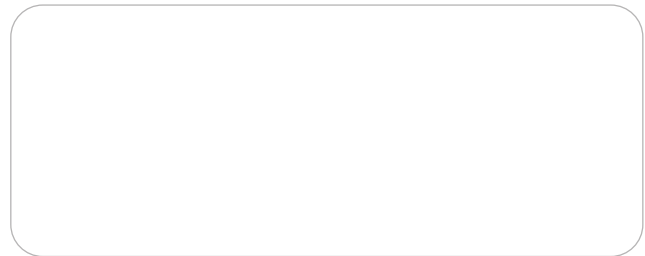

The Americas

Apex Tool Group
670 Industrial Drive
Lexington, SC 29072
USA
Tel.: +1 (800) 845 5629
Tel.: +1 (919) 387 0099
Fax: +1 (803) 358 7681
www.ClecoTools.com

Apex Tool Group
Manufacturing México
S. de R.L. de C.V.
Vialidad El Pueblito #103
Parque Industrial Querétaro
Querétaro, QRO 76220
México
Tel.: +52 (442) 211 3800
Fax: +52 (800) 685 5560

Apex Tool Group
Ind. Com. Ferram. Ltda. Av.
Liberdade, 4055
Zona Industrial Iporanga
Sorocaba, São Paulo
CEP# 18087-170
Brazil
Tel.: +55 15 3238 3870
Fax: +55 15 3238 3938

Europe | Middle East | Africa

Apex Tool Group GmbH
Industriestraße 1
73463 Westhausen
Germany
Tel.: +49 (0) 73 63 81 0
Fax: +49 (0) 73 63 81 222
www.ClecoTools.de

Apex Tool Group SAS
25 Avenue Maurice Chevalier
77330 Ozoir-La-Ferrière
France
Tel.: +33 16 44 32 200
Fax: +33 16 44 317 17

Apex Tool Group
Hungária Kft.
Platánfa u.2
9027 Győr
Hungary
Tel.: +36 96 66 1383
Fax: +36 96 66 1135

Asia Pacific

Apex Power Tool Trading
(Shanghai) Co., Ltd.
2nd Floor, Area C
177 Bi Bo Road
Pu Dong New Area, Shanghai
China 201203 P.R.C.
Tel.: +86 21 60880320
Fax: +86 21 60880298

Apex Power Tools India
Private Limited
Gala No. 1, Plot No. 5
S. No. 234, 235 & 245
Indialand Global Industrial Park
Taluka-Mulsi, Phase I
Hinjawadi, Pune 411057
Maharashtra, India
Tel.: +91 020 66761111